

Solids handling 'S' pump

Pump end specification



	Metric	US
Capacity	320 m ³ /h	1408 gpm
Total Head	21.3 m	70 ft
Max. Solids Size	100 mm	4 in
Self Priming Lift	8.8 m	28 ft
Air Handling	24 l/s	50 cfm
Selprime®	2.2 kW	3 hp
Absorbs		
Power Required	24 - 32 kW	32 - 44 hp
Pump Speed Max.	1600 rpm	1600 rpm
Pump Speed Min.	955rpm	955 rpm
Impeller Type	Vortex	Vortex
Impeller Blades	6	6
Impeller Diameter	219 mm 235 mm	8.6 in 9.25 in
Inlet Port	DN 150 PN6	6 in
Outlet Port	DN 150 PN6	6 in
Length	102 cm	40.2 in
Width	70 cm	27.6 in
Height	82 cm	32.3 in
Weight	285 kg	628 lb

Priming method - Selprime®


The unique original Selwood self priming system utilising a water tolerant diaphragm air pump. An environmentally friendly design that has none of the problems of oil vapour emissions and oil emulsification associated with other priming systems.

Pump end materials

Pump Casing	Grey Iron BSEN 1561 Grade EN-GJL-200
Impeller	Cast Iron BSEN 1563 Grade EN-GJS-450-10
Wear Plates	NA
Shaft	Steel BS EN 10277 Grade C40+C
NRV Body	Grey Iron BSEN 1561 Grade EN-GJL-200
Mechanical Seal	Silicon Carbide v Silicon Carbide
Pump End Bearing	Ball
Drive End Bearing	Cylindrical Roller

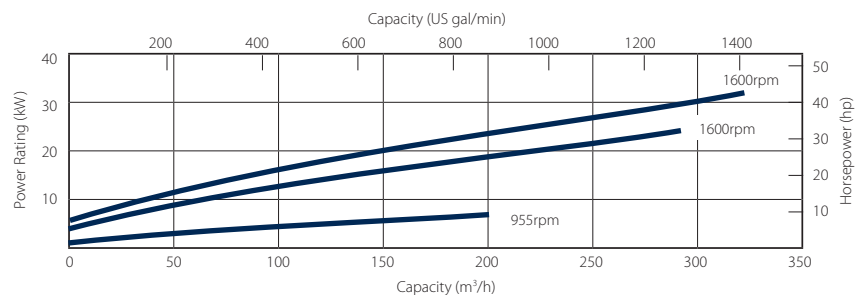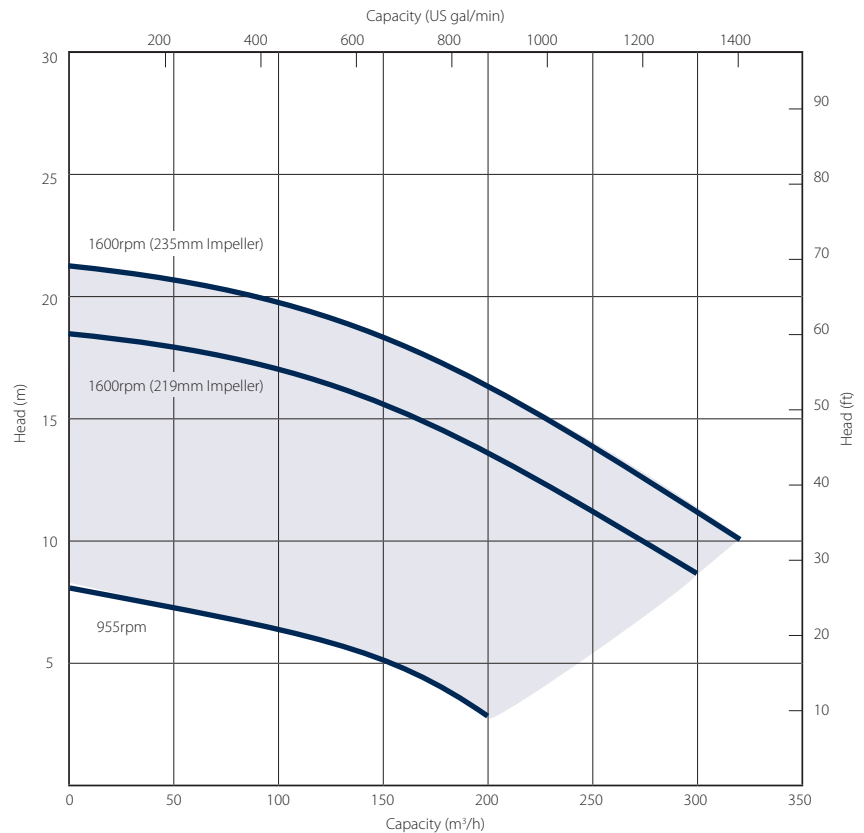

Please note: The above curves cover the complete range and ability of the pump unit. Actual performance will be subject to the engine / motor indicated overleaf and medium pumped.

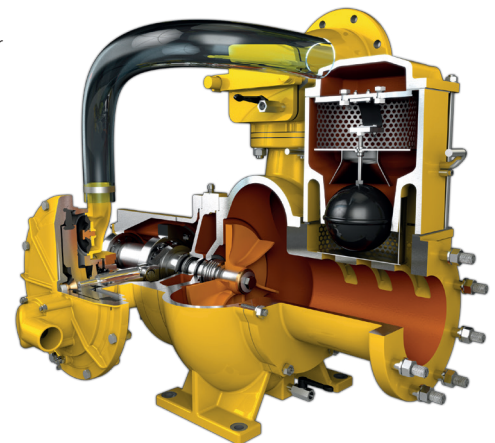

Solids handling 'S' pump builds

Our 'S Range' pumps are the market-leader when it comes to solids handling.

The vortex-flow design (Seltorque®), Selprime® automatic self-priming, emission compliant engines and ease of operation means trouble-free pumping of

- raw and unscreened sewage
- sludge or slurry
- water with fine and large solids
- water containing rags and fibres



Standard builds	Deutz Skid*		Deutz Super Silent		Isuzu Super Silent	
	Metric	US	Metric	US	Metric	US
Length	200cm	79 in	245 cm	96 in	239 cm	94 in
Width	100 cm	39 in	152 cm	60 in	149 cm	59 in
Height	148 cm	58 in	174 cm	68 in	173 cm	68 in
Dry Weight	995 kg	2194 lb	1763 kg	3887 lb	1698 kg	3743 lb
Gross Weight	1083 kg	2388 lb	1945 kg	4288 lb	1880 kg	4145 lb
Sound Power	109 LWA		92 LWA		101 LWA	
Sound Pressure @ 1m (3ft)	101 db(A)		72 db(A)		71 db(A)	
Sound Pressure @ 7m (23ft)	84 db(A)		63 db(A)		62 db(A)	
Engine	Deutz D2011 L04i		Deutz D2011 L04i		Isuzu 4JG1	
Emission Rating	Stage IIIA	NA	Stage IIIA	NA	Stage II LRA	NA
Engine Max Speed	1600 rpm		1600 rpm		1600 rpm	
Fuel Tank Capacity.**	105 lt	28 US gal	219 lt	58 US gal	219 lt	58 US gal
BEP - Fuel Consumption	5.4 lt/hr	1.43 US gal/hr	4.9 lt/hr	1.29 US gal/hr	3.3 lt/hr	0.72 US gal/hr

*Open sets exclude fittings

** Fuel tank capacity can be increased with the addition of an auxiliary fuel tank.

Installation drawings are available upon request.

Optional extras

- Training
- Genuine parts kits
- Valves / Fittings
- Pump accessories
- Hose / pipework
- Auto stop/start control panels
- Pump telemetry
- Oil drain kit
- Bulk fuel kit
- Tanks & filtration
- Pipe stoppers
- Chalwyn valve & spark arrestor

SELWOOD
www.selwood.co.uk

UK Rental
03330 142000

UK Sales
023 8025 0137

International Sales
+44 23 8025 0137

Head Office Bournemouth Road, Chandler's Ford, Eastleigh, Hampshire, SO53 3ZL. T 023 8026 6311 E info@selwood.co.uk